


# Great Southern Log Homes

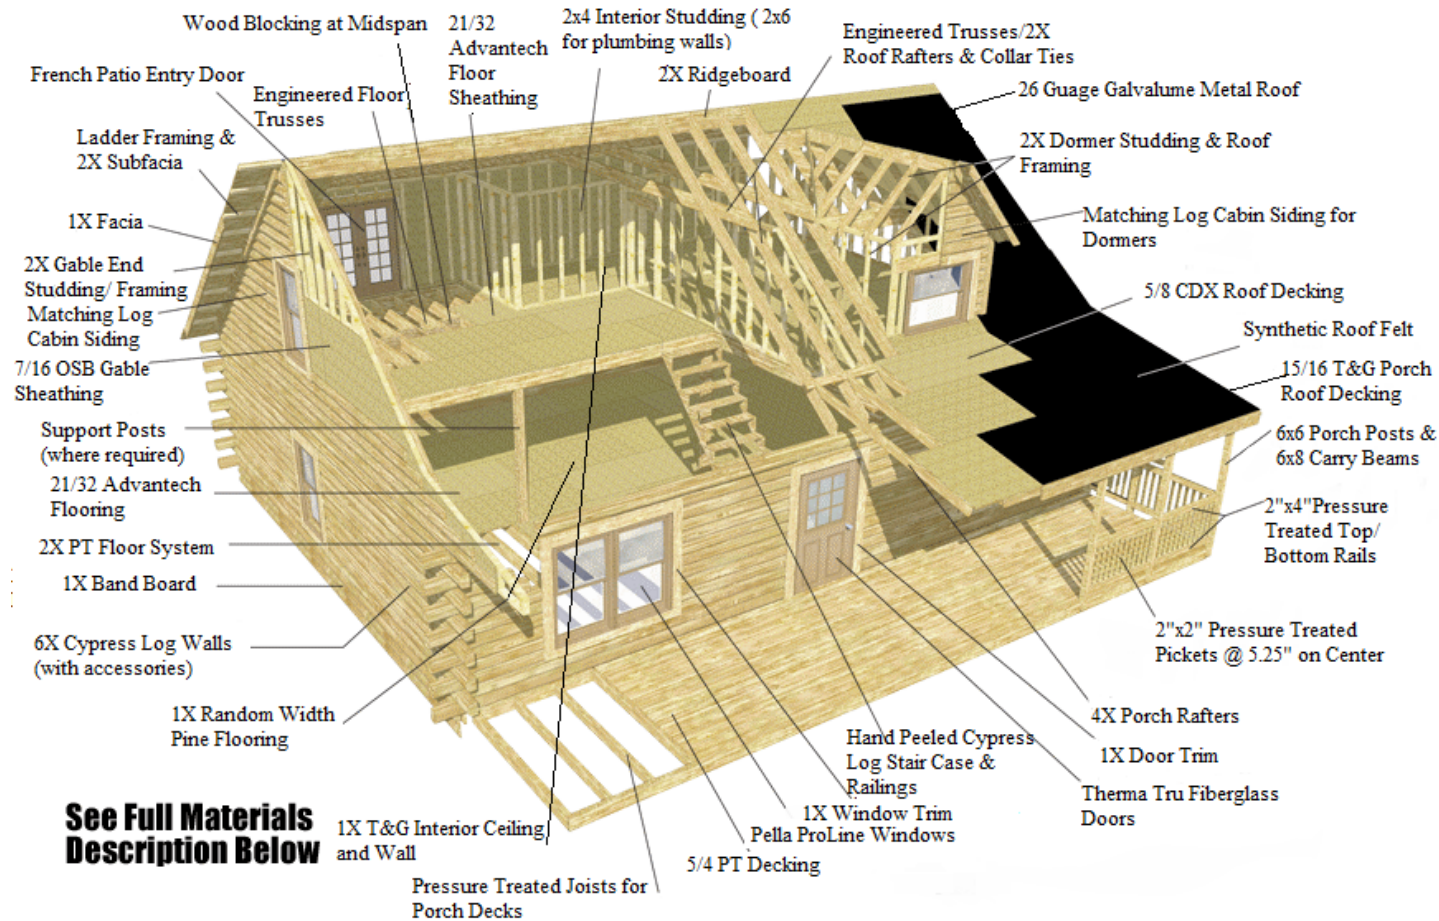

## Material List

### Log Materials Package: All in One on a Crawl space

Great Southern Homes guarantees sufficient quantities of material provided in the following material list. If there is a shortage due to our error, we will supply the material in a timely manner to the jobsite at no cost to the owner.

**Beam sizes-** All structural lumber and beams are designed and sized based on the geographic location in which the home is built. The sizes are primarily based on wind loads or snow loads. If sizes of beams are identified in this material list, they may change due to engineering.

#### Floor System: (main)

1. 2x10 pt floor joist 16" oc
2. 2x8 pt sill plate
3. ¾ inch T&G plywood
4. Sub-floor adhesive

**Exterior Walls:**

1. 6-inch Cypress Logs
2. All necessary fasteners, tape and caulk for log stack

**Gable Ends: (if applicable)**

1. 1x Cypress siding to match
2. 7/16 OSB (if applicable)
3. Or Full log depending on package

**Trim: (Exterior side) All Cypress**

1. 1x6 trim for windows and doors
2. 1x6 V-joint for main roof soffits
3. 1x8 trim for main roof fascia.

**Trim: (Interior side)**

1. 1x6 for windows and doors
2. 1x4 for interior doors and baseboard
3. Six panel Interior doors
4. 1x6 T&G for interior walls and ceilings
5. 1x4 for misc. trim
6. 1x Random width pine flooring

**Interior Stairs: (if applicable)**

1. ½ log stringers
2. ½ log treads
3. All necessary log post
4. All necessary log rails
5. All necessary log spindles

**Second Floor system: (if applicable)**

1. Engineered floor trusses
2. ¾ inch T&G Plywood
3. Sub-floor adhesive

**Main Roof System:**

1. Engineered trusses
2. Synthetic roof paper
3. 5/8 CDX Plywood

**Metal Roof:**

1. Galva-lum 26-gauge metal roof & accessories

**Covered porch system: (Cypress)**

1. Post 6x6
2. Headers 6x8
3. 4x6 rafters
4. 4x8 hips (wrap around porch only)
5. 15/16 T&G decking
6. Synthetic roof paper

**Porch & Deck Floor system: Pressure treated lumber**

1. 2x8 pt girders
2. 2x6 pt joist
3. 2x8 pt ledger board
4. 5/4 pt deck boards
5. Pt lumber for stairs (2 sets)
6. 2x2 pt spindles for porch railings
7. 2x4 rails w/2x6 top for porch railings

**Windows & Doors:**

1. Pella Proline Double Hung Windows w/screens

**Exterior Doors:**

1. Therma Tru Fiberglass Doors

**Interior Wall Framing:**

1. 2x4 top and bottom plates
2. 2x10 Headers where needed

**Stain:**

1. Exterior Ultra Stain
2. Exterior Advance Top coat
3. Interior Prelude
4. Interior Finish

**Blueprints:**

1. 3 copies

## **Log Materials Package: Dry-In on a Crawl space**

Great Southern Log Homes guarantees sufficient quantities of material provided in the following material list. If there is a shortage due to our error, we will supply the material in a timely manner to the jobsite at no cost to the owner.

**Beam sizes-** All structural lumber and beams are designed and sized based on the geographic location in which the home is built. The sizes are primarily based on wind loads or snow loads. If sizes of beams are identified in this material list, they may change due to engineering.

### **Floor System: (main)**

1. 2x10 pt floor joist 16" oc
2. 2x8 pt sill plate
3. ¾ inch T&G plywood
4. Sub-floor adhesive

### **Exterior Walls:**

1. 6x8 Cypress Log
2. All necessary fasteners, tape and caulk for log stack

### **Gable Ends: (if Applicable)**

1. 1x12 Cypress Board & Batten
2. 7/16 OSB (if siding)

### **Trim: (Exterior) All cypress**

1. 1x6 trim for windows and doors (exterior walls only).
2. 1x6 V-joint for main roof soffits (exterior only).
3. 1x8 trim for main roof fascia.
4. 2x2 spindles for porch railings
5. 2x4 rails w/2x6 top for porch railings

### **Second Floor system: (if applicable)**

1. Engineered floor trusses
2. ¾ inch T&G Plywood
3. Sub-floor adhesive

### **Interior Stairs: (if applicable)**

1. ½ log stringers
2. ½ log treads
3. All necessary log post

4. All necessary log rails
5. All necessary log spindles (no tennons)

**Roof System:**

1. Engineered trusses
2. Synthetic roof paper
3. 5/8 CDX Plywood

**Covered porch system: All wood cypress**

1. Post 6x6
2. Headers 6x8
3. 4x6 rafters
4. 4x8 hips (wrap around porch only)
5. 15/16 T&G Cypress decking
6. Synthetic roof paper

**Porch & Deck Floor system:**

A .2x8 pt girders

1. 2x6 pt joist
2. 2x8 pt ledger board
3. 5/4 pt deck boards
4. Pt lumber for stairs (2 sets)

**Interior Wall Framing:**

1. 2x4 Studs
2. 2x4 top and bottom plates
3. 2x10 Headers where needed

**Windows:**

1. Pella Proline Double Hung Windows w/screens

**Doors:**

1. Therma-tru fiberglass 9 lite doors

**Blueprints:**

1. 3 copies